



N5455A Mask/Waveform Limit Testing (Option LMT) For Agilent InfiniiVision Series Oscilloscopes

Data Sheet

Test waveforms to specified standards in seconds instead of hours using hardware-accelerated mask testing

Features

- Test up to 100,000 waveforms per second with the industry's fastest hardware-accelerated mask testing technology
- Automatic mask creation using input standard
- Easily download multi-region masks and setups based on industry standards
- Detailed pass/fail statistics
- Test to high-quality standards based on "Sigma"
- Multiple user-selectable test criteria



If you need to validate the quality and stability of your electronic components and systems, Agilent's mask test option (Option LMT or N5455A) for InfiniiVision Series oscilloscopes can save you time and provide pass/fail statistics almost instantly. The mask test option offers a fast and easy way to test your signals to specified standards, as well as the ability to uncover unexpected signal anomalies, such as glitches. Mask testing on other oscilloscopes is usually based on software-intensive processing technology, which tends to be slow. Agilent's InfiniiVision scopes mask test option is based on hardware-accelerated technology, meaning that InfiniiVision Series oscilloscopes can perform up to 100,000 real-time waveform pass/fail tests per second. This makes your testing throughput orders of magnitude faster than you can achieve on other oscilloscope mask test solutions.



Agilent Technologies

Using AutoMask

Figure 1 shows an example where we automatically created a pulse-shaped mask using an input signal standard. You can easily specify horizontal and vertical tolerance bands in either divisions or absolute volts and seconds. We set up the mask test to run continuously in order to accumulate valid pass/fail statistics. In this example, we quickly detected an infrequent glitch. After running the test for just a few seconds, the mask test statistics showed that the scope performed the pass/fail mask test more than 1,000,000 waveforms and detected 39 errors for a computed error rate of 0.0036%. In addition, we can see that this particular signal has a “sigma” quality relative to the mask tolerance of approximately 5.4σ .

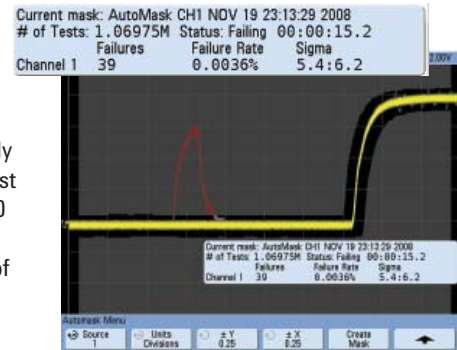


Figure 1: Mask testing uncovers an infrequent signal anomaly.

Importing an industry-standard mask

Figure 2 shows an example of a FlexRay eye-diagram mask test. This particular 8-bit multi-polygon mask is based on a published standard and was created on a PC using a simple text editor. We then imported the mask and setup parameters were then imported into the scope via a USB memory stick. We set up the test criteria to “stop-on-error”. In this measurement example, the first violation of the mask occurred after testing more than 44,000 waveforms (350,000 bits tested).

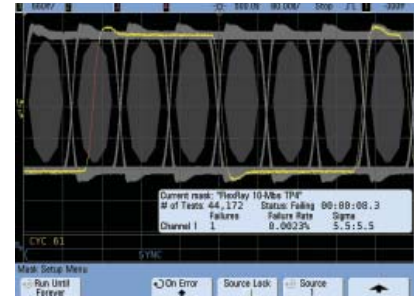


Figure 2: Testing a FlexRay eye-diagram with an imported industry-standard mask.

Multiple test criteria

When setting up your specific mask test criteria, you can choose from multiple options including:

- Run forever (with accumulated pass/fail statistics)
- Run until a specified number of test
- Run until a specified time duration
- Run until a maximum ideal “sigma” standard
- Stop-on-failure
- Save-on-failure
- Print-on-failure
- Trigger out-on-failure or on-pass

Six Sigma mask testing

Agilent InfiniiVision Series scopes are the first in the industry that can report mask test pass/fail statistics in “sigma” quality. InfiniiVision’s fast acquisition and waveform mask test rate of up to 100,000 waveforms/sec makes this possible and for the first time, practical. If waveform failures follow a random/Gaussian failure distribution, Six Sigma quality represents approximately three failures/defects or fewer out of a test sample of 1,000,000. InfiniiVision Series scopes can test up to a Six Sigma standard in as little as 3.2 seconds. To learn more about waveform mask testing to “Six Sigma” quality standards, refer to Application note #1609, “Testing Waveforms to a Six Sigma Standard Using Hardware-Accelerated Mask Testing,” listed at the end of this document.

Performance Characteristics

Mask test source	Analog channels 1, 2, 3, or 4
Maximum test rate	Up to 100,000 waveforms tested per second
Acquisition modes	Real-time sampling–non-averaged, Real-time sampling–averaged
Mask creation AutoMask-divisions AutoMask-absolute Mask file import	+/- X divisions, +/- Y divisions +/- X seconds, +/- Y volts Up to 6 failure regions (created in text editor)
Mask scaling	Source lock on (mask automatically re-scales with scope settings) Source lock off (mask scaling fixed relative to display when loaded or created)
Test criteria Run until Action on error	Forever, Minimum number of tests, Minimum time, Minimum sigma, Stop acquisitions Save waveform or image Print
Trigger output	On error, On pass
Statistics display	Number of tests, Number of failures (for each channel tested), Failure rate (for each channel tested), Test time (hours – minutes – seconds), Sigma (actual versus maximum without failures)
Display formats	Mask – translucent gray, Failing waveform segments – red, Passing waveform segments – channel color
Save/recall	4 non-volatile internal registers (.msk format), USB memory stick (.msk format)

Ordering Information

The mask/waveform limit test option is compatible with all Agilent InfiniiVision Series oscilloscopes (5000, 6000, and 7000 series scopes). This option is available as a factory-installed option if ordered as Option-LMT along with a specific oscilloscope model, or existing InfiniiVision Series oscilloscope users can order this option as an after-purchase product upgrade (N5455A).

Related Agilent literature

Publication Title	Publication Type	Publication Number
<i>Agilent Technologies Oscilloscope Family Brochure</i>	Brochure	5989-7650EN
<i>Agilent 7000 Series InfiniiVision Oscilloscopes</i>	Data sheet	5989-7736EN
<i>Agilent 6000 Series InfiniiVision Oscilloscopes</i>	Data sheet	5989-2000EN
<i>Agilent 5000 Series InfiniiVision Oscilloscopes</i>	Data sheet	5989-6110EN
<i>Agilent InfiniiVision Series Oscilloscope Probes and Accessories</i>	Data sheet	5968-8153EN
<i>Testing Waveforms to a Six Sigma Standard Using Hardware-accelerated Mask Testing</i>	Application note	5990-3200EN
<i>Evaluating Oscilloscopes for Best Signal Visibility</i>	Application note	5989-7885EN

To download these documents, insert the publication number in the URL:
<http://cp.literature.agilent.com/litweb/pdf/xxxx-xxxxEN.pdf>



Agilent Email Updates

www.agilent.com/find/emailupdates
Get the latest information on the products and applications you select.



Agilent Direct

www.agilent.com/find/agilentdirect
Quickly choose and use your test equipment solutions with confidence.



www.agilent.com/find/open
Agilent Open simplifies the process of connecting and programming test systems to help engineers design, validate and manufacture electronic products. Agilent offers open connectivity for a broad range of system-ready instruments, open industry software, PC-standard I/O and global support, which are combined to more easily integrate test system development.



www.lxistandard.org
LXI is the LAN-based successor to GPIB, providing faster, more efficient connectivity. Agilent is a founding member of the LXI consortium.

Microsoft is a U.S. registered trademark of Microsoft Corporation.



Agilent Technologies Oscilloscopes

Multiple form factors from 20 MHz to >90 GHz | Industry leading specs | Powerful applications

Remove all doubt

Our repair and calibration services will get your equipment back to you, performing like new, when promised. You will get full value out of your Agilent equipment throughout its lifetime. Your equipment will be serviced by Agilent-trained technicians using the latest factory calibration procedures, automated repair diagnostics and genuine parts. You will always have the utmost confidence in your measurements. For information regarding self maintenance of this product, please contact your Agilent office.

Agilent offers a wide range of additional expert test and measurement services for your equipment, including initial start-up assistance, onsite education and training, as well as design, system integration, and project management.

For more information on repair and calibration services, go to:

www.agilent.com/find/removealldoubt

Product specifications and descriptions in this document subject to change without notice.

www.agilent.com

www.agilent.com/find/masktest

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at:

www.agilent.com/find/contactus

Americas

Canada	(877) 894-4414
Latin America	305 269 7500
United States	(800) 829-4444

Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 112 929
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Thailand	1 800 226 008

Europe & Middle East

Austria	01 36027 71571
Belgium	32 (0) 2 404 93 40
Denmark	45 70 13 15 15
Finland	358 (0) 10 855 2100
France	0825 010 700*
	*0.125 €/minute
Germany	07031 464 6333
Ireland	1890 924 204
Israel	972-3-9288-504/544
Italy	39 02 92 60 8484
Netherlands	31 (0) 20 547 2111
Spain	34 (91) 631 3300
Sweden	0200-88 22 55
Switzerland	0800 80 53 53
United Kingdom	44 (0) 118 9276201

Other European Countries:

www.agilent.com/find/contactus

Revised: October 6, 2008

© Agilent Technologies, Inc. 2008
Printed in USA, November 30, 2008
5990-3269EN



Agilent Technologies